## Model: EX26

High resolution, 1080P AHD Dual Camera Wide Angle In Cab Camera, Wide Dynamic Resolution Front Camera




# Features:

- Aluminum Allow Housing
- In Cab 100° Wide Angle Camera with Infrared LED & Microphone
- Front Camera with Real Wide Dynamic Resolution
- Strong Light Inhibition
- Support Windscreen with Different Angle
- 1080P x 2channel AHD Camera

#### **Packing list:**

Camera 1
Instruction Manual 1
Lock screw key 1
3meter Extension Cable 1



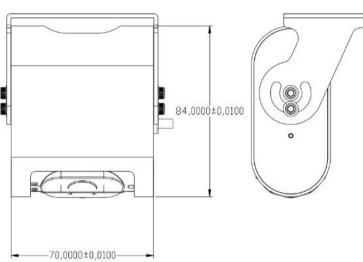

#### **Specifications:**

## Camera 1

Samera 1	
Model	EX26-In Cab Camera
Image Sensor	1/3" FH8536
TV System	PAL/NTSC (optional)
Picture Elements	1920 (H) x 1080 (V)@30fps
Viewing Angle	100°
Sensitivity	0 Lux (IR LED On)
Scanning System	Progressive scan RGB CMOS
Synchronization	Internal
S/N Ratio	≤40db (AGC Off)
Auto Gain Control (AGC)	Auto
Electronic Shutter	Auto
BLC	Auto
Infrared Spectrum	940nm
Infrared LED	6 LEDs
Video Output	1 Vp-p, 75Ω,AHD 1080P
Audio	Included
Mirror	Optional
ICR	1
Noise Redution	3D
Dynamic range	83.5 dB
Lens	F/NO=2.3±5%
Focus	F=4.0±5%mm
Tilt Adjusting	0-85°
Power Supply	9-18V DC
Power Consumption	52mA IR off, 160mA IR on
Weatherproof/Water Proof	/
Operating Temperature	-30°C to +85°C

#### Camera 2

Carriera E	
Model	EX26-Front Camera
Image Sensor	1/2.8" FH8333
TV System	PAL/NTSC (optional)
Picture Elements	1920 (H) x 1080 (V)@30fps
Viewing Angle	57°
Wide Dynamic Range	84db @8x
Sensitivity	4.2V/Lux. Sec
Scanning System	Progressive scan RGB CMOS
Synchronization	Internal
S/N Ratio	≤43dB (AGC Off)
Auto Gain Control (AGC)	Auto
Electronic Shutter	Auto
BLC	Auto
Infrared Spectrum	1
Video Output	1 Vp-p, 75Ω,AHD 1080P
Audio	1
Mirror	Optional
ICR	1
Noise Reduction	3D
Lens	F/NO=2.3±5%
Focus	F=6.0±5%mm
Tilt Adjusting	0-80°
Power Supply	9-18V DC
Power Consumption	55mA
Weatherproof/Water Proof	1
Operating Temperature	-30°C to +85°C